



KUNGL.

LUFTFARTSSTYRELSEN

Stockholm 12

ROYAL BOARD OF CIVIL
AVIATION

Sweden

Specification No. 5B/55

Model Saab 91B, Safir

June 10th, 1955

AIRCRAFT SPECIFICATION


An aircraft of the type specified below and conforming with approved data on file with the Swedish Board of Civil Aviation will upon application receive an airworthiness certificate, when in the opinion of the Inspector General the aircraft is in an air-worthy condition.

| | |
|------------------|--|
| Aircraft Model | Saab 91B, Safir. |
| Designer | Svenska Aeroplan AB (Saab Aircraft Co.), Linköping, Sweden. |
| Design | The type of aircraft conforming with this specification complies with the valid Swedish airworthiness requirements. This type of aircraft is, proved to be designed in conformity with the requirements for the normal and acrobatic categories of the U.S. Civil aeronautics Board's CAR Part 3, Airplane Airworthiness, dated November 1, 1949, with all amendments published up to and including no. 3-7, effective March 5, 1952. |
| Type Certificate | No. A5/53, dated January 22, 1953. |
| Manufacturer | Saab Aircraft Co., Linköping Sweden, or Koninklijke Maatschappij "De Schelde", Dordrecht, Holland. |
| General | Three-seat enclosed cabin, single engine monoplane. Tricycle retractable undercarriage. Low single-spar cantilever wing. Stressed-skin Alclad sheet covering except for fabric-covered wing trailing edge and movable control surfaces. Tailplane of monoplane type. All metal split flaps. Dual controls of conventional type. Fuel tank in fuselage. |
| Dimensions | Span 10,6 m (34 ft 9 in) Length 7,9 m (25 ft 11 in) Height 2,2 m ₂ (7 ft 3 in) Wing area 13,6 m ² (146 sq.ft.) |
| Engine | Lycoming O-435-A Rating, take-off, 190 hp at 2550 rpm " , normal, 140 hp at 2300 " |
| Fuel | Minimum 80 octane aviation gasoline |

Copies of this specification may be obtained upon application to
Kgl luftfartsstyrelsen, Stockholm 12, Sweden.

| | |
|------------------|--|
| Propeller limits | Maximum permissible diameter 2080 mm (6ft 10 in) |
| Airspeed limits | Glide or dive 342 km/h (213 mph) IAS Flaps extended 153 km/h (95 mph) IAS Landing gear operation 175 km/h (109 mph) IAS Landing gear extended 220 km/h (137 mph) IAS |
| C.G. range | Normal category: Sta. 2208 (5 % MAC) to 2510 (27,1 % MAC) at 830 kg. Sta. 2263 (9 % MAC) to 2510 (27,1 % MAC) at 1050 kg Sta. 2364 (16,4 % MAC) to 2510 (27,1 % MAC) at 1165 kg Acrobatic category: Sta. 2208 (5 % MAC) to 2510 (27,1 % MAC) at 830 kg Sta. 2263 (9 % MAC) to 2510 (27,1 % MAC) at 1050 kg |

Center of gravity limits (within area indicated)

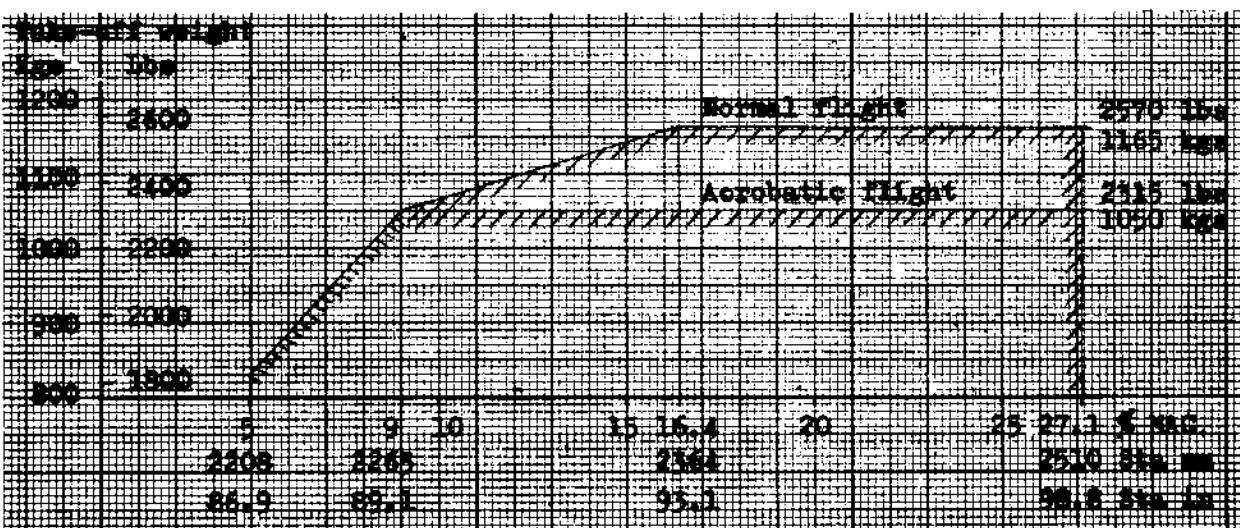

Retracting of the landing gear does not to any appreciable amount affect the location of the C.G. of the aeroplane.

| | |
|-----------------|---|
| Datum | Fuselage Station 0, located 2570 mm in front of the centre of bolt in main spar fitting, lower side of wing, or 3800 mm in front of the forward side of the frame behind the rear seat. |
| MAC | 1365 mm. Leading edge of MAC is at Sta 2140. |
| Levelling means | The fuselage rail shall be horizontal. |
| Max. weight | 1165 kg (2570 lbs) for normal category, 1050 kg (2315 lbs) for acrobatic category. The rear seat may not be occupied during acrobatic flight. |
| Empty weight | Approx. 720-750 kg (1585-1650 lbs) according to equipment (See Note 2). |
| Number of seats | Three (two at 2445 mm and one at 3500 mm) (See Note 1). |

| | |
|---------------------|-------------------------------------|
| Fuel capacity | 175 lit. (38.5 Imp.gals) (3310 mm). |
| Oil sump capacity | 11,4 lit. (2.5 Imp.gals) (780 mm). |
| Baggage compartment | (3325 mm). |

EQUIPMENT

| 1. | <u>Wing</u> | Item | Weight | Location (See Note 1) |
|-----|---------------------------------------|---|--------------------|--|
| | | Saab no. SA 1076034 (left) and SA 1076036 (right) or SA 1079944 (left) and SA 1079945 (right). | | After change of wing, determine new empty weight and C.G. position of aircraft by weighing. |
| 2. | <u>Engine</u> | | | |
| 2.1 | | Lycoming O-435-A with starter and generator but without propeller | 184 kg (406 lbs) | (770 mm) |
| 3. | <u>Propeller</u> | | | |
| 3.1 | | Hartzell HC-12x20-8D with metal blades 8433-6 | 30,4 kg (67.0 lbs) | (180 mm) |
| | | or HC-12x20-8D with plastic blades 8428-6 | 28,1 kg (62.0 lbs) | (180 mm) |
| | | or HC-12x20-8C with metal blades 8433-6 | 31,3 kg (69.0 lbs) | (180 mm) |
| | | or HC-12x20-8C with plastic blades 8428-6 | 28,1 kg (62.0 lbs) | (180 mm) |
| 4. | <u>Landing gear</u> | | | |
| 4.1 | | Nose wheel installation (380x150 mm tire model 527586) Saab dwg no. 1075016-1 | 17,2 kg (37,9 lbs) | (1425 mm) |
| 4.2 | | Main wheels installation, total weight (465x165 mm tire, model 527584) Saab dwg no. 1075015-1 (left) and 1075015-2 (right) | 35,5 kg (78.3 lbs) | (2935) |
| 5. | <u>Electrical and Radio Equipment</u> | | | |
| 5.1 | | Starter, Delco-Remy | 8,2 kg (18.0 lbs) | (860 mm) |
| 5.2 | | Generator, Delco-Remy | 4,8 kg (10.6 lbs) | (870 mm) |
| 5.3 | | Battery, Reading R 24 | 21,0 kg (46.3 lbs) | (3900 mm) |
| 5.4 | | Radio See Note 3 | | |
| 6. | <u>Other Equipment</u> | | | |
| 6.1 | | Pilot seat left | 1,5 kg (3.3 lbs) | (2445 mm) |
| 6.2 | | Pilot seat right, incl. seat back | 4,2 kg (9.3 lbs) | (2445 mm) |
| 6.3 | | Rear seat | 4,0 kg (8.8 lbs) | (3500 mm) |
| 6.4 | | Tool kit | 4,7 kg (10.4 lbs) | (3900 mm). |

| | | | |
|-----|---|------------------|-----------|
| 6.5 | Safety belts, | | |
| | front seats, left and right, each | 0,5 kg (1.0 lbs) | (2445 mm) |
| | Saab dwg no. 1038020-1 | | |
| | rear seat. Saab dwg no. 1038020-2 | 0,5 kg (1.0 lbs) | (3500 mm) |
| | Safety harness, front seats only, | | |
| | Safety belt as above with the addition of shoulder strap Saab dwg no. 1077965 | | |
| | complete each | 1,1 kg (2.5 lbs) | (2445 mm) |

NOTE 1. Values in mm shown in parentheses after equipment represent the horizontal arms from the Datum to the C.G. of the item measured.

NOTE 2. Aeroplane Flight Manual, including list of basic equipment and weight data, will be submitted for each aircraft with the certificate of airworthiness.

NOTE 3. Aircraft radio may be installed. The radioinstallation shall be inspected and certificated.
Available power for radio equipment is 200 W.

ROYAL BOARD OF CIVIL AVIATION
Division of Civil Aviation Inspection



Ulf Cewers
Inspector General a i